# SWITCHING POWER SUPPLIES SWITCHING POWER SUPPLY HP5424

BI

### **Application area**

Voltage supply of MultiControl via flat cable. Voltage supply of DriveControl or ZoneControl via round cable. Basic voltage supply of 24-V DC products.

### **Product description**

The Interroll switching power supply HP5424 is a three-phase power supply for providing 24-V DC voltage. The robust housing achieves a protection rating of IP54. This allows placement in the immediate vicinity of the products to be supplied with 24 V DC, such as Interroll MultiControl. The central voltage supply saves costs for control cabinets and allows very short lines which, in turn, lead to cost savings and error reduction with respect to voltage drops on the line.

The HP5424 is immediately operational, all required functions, such as circuit protection or maintenance switches, are already present. Given its high level of overload capability, the power supply is perfectly adjusted to the current requirements of the RollerDrive EC5000. This ensures the power supply of several RollerDrive starting at the same time.

#### Properties

- No installation in switch cabinet required
- Compact design using heat dissipation element
- Very high peak output (150 %)
- Adjustable circuit protection (jumper)
- Overcurrent protection with resettable fuse
- Status signal
- · LED status display
- · 400 V AC can be looped through
- · 4 24-V DC outputs are available
- · Multiple terminal points, no special and expensive connectors required
- · Brake chopper for limiting feedback voltage resulting in feedback capability
- $\cdot$  Lockable maintenance switch against reactivation
- Screw for connecting/disconnecting ground potential of primary side with ground of secondary side
- Maintenance-free
- · No power reduction (derating) over the entire operating temperature range



# SWITCHING POWER SUPPLIES SWITCHING POWER SUPPLY HP5424

## Technical data


| Electrical data                                     |  |
|---|--|
| Rated supply voltage                                | 400 V AC, 3 phases   |
| Supply system voltage range                         | 380 to 480 V AC ± 10 %   |
| Supply system frequency                             | 50 to 60 Hz ± 6 %  |
| Supply system power consumption                     | Typically 1.6 A per phase at 3 x 400 V AC  |
| Rated output voltage                                | 24 V DC  |
| Rated output power                                  | 960 W  |
| Rated peak power                                    | Max. 1440 W at 24 V DC for 4 s, repetition rate depends on duration and actual peak load |
| Maximum output current                              | 60 A at 24 V DC for 4 s  |
| Current limitation for each output                  | 10, 16, 25 A   |
| Efficiency  | Min. 92 %  |
| Feedback resistance                                 | ≤ 35 V DC  |
| Brake chopper                                       | 30 W (briefly 200 W)   |
| Ambient conditions                                  |  |
| Protection rate                                     | IP54   |
| Ambient temperature in operation                    | -30 to 40 °C   |
| Ambient temperature during transport<br>and storage | −40 to 85 °C   |
| Max. installation height above sea level            | 1000 m*  |
| Miscellaneous data                                  |  |
| Weight  | 4 kg   |
| Color   | RAL9005 (black)  |
|   |  |


\* The installation in systems at an altitude above 1000 m is possible. However, this can lead to a reduction of the performance values.


# SWITCHING POWER SUPPLIES SWITCHING POWER SUPPLY HP5424



### **Dimensions**

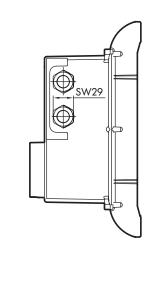

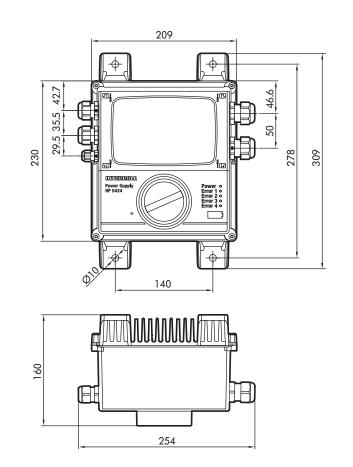



## Accessories

Set of rubber seals for all cable screw connections

- · 24-V DC output for one flat cable, article number: S-1115406
- 24-V DC output for two flat cables, article number: S-1115407
- 24-V DC output for a round cable (ø 5 up to 13 mm), article number: S-1115405

## Scope of delivery

· Fit all cable screw connections (in the screwed-on condition) with dummy plugs. Jumper for current limitation of all cables.